

ELECTRIC LIGHT-DUTY CRANES

CE1500FB



MAX. CAPACITY 1,500 LBS

4,500 FT-LBS

MAX. REACH **5 FT**

MIN. GVWR NO MIN.

CONTROLS **ELECTRIC**

FEATURES

■ COMPACT STORAGE

The CE1500FB includes a 3-5 ft manual extension which folds down for storage.

■ FRICTION-LESS MANUAL ROTATION

Manual 360-degree rotation with band brake provides unlimited, easy-to-use controlled load positioning.

■ MULTIPLE HEIGHT OPTIONS

The CE1500FB includes multiple cut-down options to fit a variety of applications.

A SMALL CRANE SOLUTION.

The CE1500FB is an economical chioce for light and mediumduty applications and includes a 1,500 lb capacity with electric winch, manual rotation, extension with a folding boom for easy storage.

SPECIFICATIONS

Lifting Capacities:	1,500 lbs
Crane Rating:	4,500 ft-lbs
Mounting Space:	12" x 12"
Stowed Height:	62"
Rope Diameter:	9/64" @ 60'
Line pull speed:	14.1 ft/min
Max. Single-line:	650 lbs
Max. Double-line:	1,500 lbs
Rotation:	360-Degree Band Brake
Power Supply:	Electric 12V DC
Requirements:	12v DC Battery
Hydraulic Req:	No Hydraulics
Boom Elevation:	1-position (60°)
Controls:	12V DC On/Off Winch

OPTIONS & ACCESSORIES

Optional Mast Cut-Down

The CE1500FB includes multiple options for cutting down the mast to fit different utility bodies.

Jacklegs

(Optional) Single jackleg for utility body (0 - 24") or for platform bodies (27' - 45")


Rotation

360-degree manual rotation with band brake provides unlimited controlled load positioning.

150 AMP Circuit Breaker

Venturo Electric 12V DC cranes recommend a 150 AMP Circuit Breaker Kit to be installed as close to the vehicle battery as possible.

MAXIMUM LOAD CAPACITY CHART

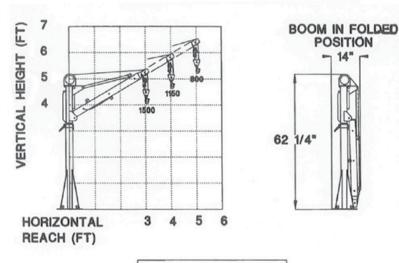

MUST USE SNATCH BLOCK FOR LOADS GREATER THAN 1000 LBS.

