

HYDRAULIC CRANES HT45KX(20')



MAX. CAPACITY

7,500 LBS

CRANE RATING

45,600 FT-LBS

MAX. REACH 20'

MIN. GVWR 16,000 LBS CONTROLS VI CTM

FEATURES

- **FULL-HYDRAULIC EXTENSION** The HT45KX-VLC offers a 20 ft hydraulic power boom extension.
- NEW AUTO ADJUST ANTI-TWO BLOCK Innovative, rugged and compact antitwo block design automatically adjusts to boom angle. Minimizes hook-toboom tip height and is less prone to damage.
- **NEW BOOM TIP WORKLIGHT** Optional worklight that automatically adjusts to the boom angle so you can follow your load anytime.

The Venturo HT45KX with VLC™ controls features a maximum capacity of 7,800 lb. Venturo's new Electronic Crane Control Management System provides added safety and benefits for crane operators. Benefits include a standard, wireless, pistolgrip controller, overload protection which controls and prevents any type of overload, LCD Display Screen alerts, transmitter handle vibrations, green/yellow/red alert lights under boom, and corresponding lights on the receiver. The LCD display shows percentage of load, boom angle in degrees and percentage of total capacity during crane operation. The VLC™ system also provides vehicle stability and grade control.

SPECIFICATIONS

Lifting Capacities:	7,500 lbs
Crane Rating:	45,600 ft-lbs
Mounting Space:	17" x 17"
Stowed Height:	36-5/8"
Rope Diameter:	3/8" @ 100'
Line pull speed:	60 ft/min @ 12 GPM (Single)
Max. Single-line:	3,750 lbs
Max. Double-line:	7,500 lbs
Rotation:	400°
Power Supply:	PTO & Pump Required
Requirements:	12 gpm @ 3,000 psi
Hydraulic Req:	25 Gallon Reservoir
Boom Elevation:	-8° to +75°
Controls:	VLC™ (Venturo Logic Controls) Standard Wireless Remote
Boom Extension 1:	10' - 16' - 20' Full Hydraulic
Minimum GVWR:	Class 5 (16,000 LBS)

844-TEREX-4U

VLC™ SYSTEM CONTROLS



Multiple Safety and Capacity Alerts Green/Yellow/Red alert light located on the underside of the

boom.

Overload/Stability Safety


The VLC system controls and prevents any type of overload on the crane and also provides stability and grade control.



Wireless Remote

The wireless remote, pistol-grip controller is a standard feature as part of the VLC™ system for ALL proportionally-controlled hydraulic Venturo service cranes.

MAXIMUM LOAD CAPACITY CHART

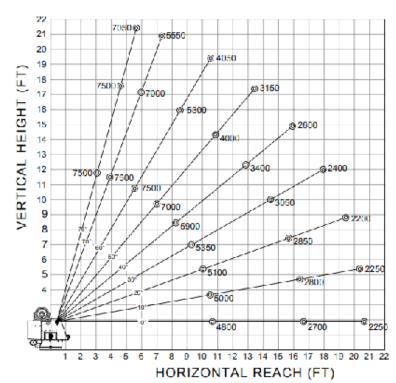



Venco Venturo Industries LLC 12110 Best Place | Cincinnati, Ohio 45241 800-226-2238 | 513-772-8448 Local info@venturo.com | www.venturo.com

NOTE: All Venturo service cranes meet ANSI B30.5 and OSHA 1910.180 specifications. Specifications subject to change without notice. Copyright © 2019 Venco Venturo Industries LLC. All Rights Reserved.